

Your horizontal baling & bagging solution


Specially designed for baling & bagging a comprehensive range of materials such as **textile rag**, **chopped straw**, **wood shaving**, **cotton seed**, **fiber**, **sawdust**, **rice husk**, **coco peat**, **peanut shell** and **paper shred** into dense bales. It is an ideal choice for animal bedding material factories, rag bales traders, husk an cotton seeds recycling factories. Choose from our existing models or contact us for customized models today to meet your specific baling demands.

HORIZONTAL BALING & BAGGING MACHINE

SERIES 1 // SHB1-WS-300 . SHB1-WS-400 . SHB1-WS-500 . SHB1-WS-600

SERIES 2 // SHB1-WS-50 . SHB1-WS-100 . SHB1-WS-150 . SHB1-WS-250

CUSTOMIZED // MADE-TO-ORDER MODELS ARE AVAILABLE

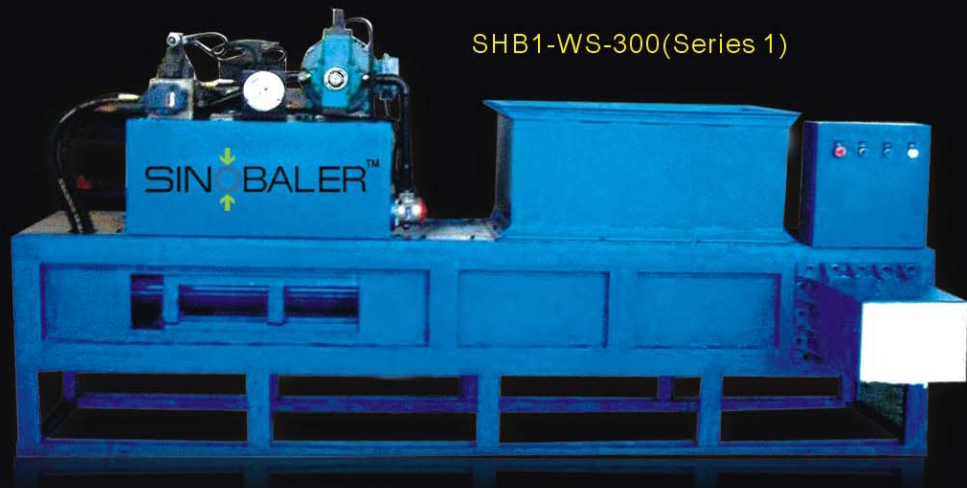

SHB1-WS-300(Series 1)



SHB1-WS-150(Series 2)

CE
APPROVED
ISO
9002
COMPLIANT

Features

PLC Control System
simplifies the operation

One Button Operation
press and ejection achieved through one push button operation making this baler highly efficient

Automatic Material Conveying & Feeding System
is optional to maximize the throughput rate which can as high as 60bags per hour

Specifications

| MODEL | SHB1-WS-300 | SHB1-WS-400 | SHB1-WS-500 | SHB1-WS-600 |
|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Compressing force | 30Tons | 40Tons | 50Tons | 60Tons |
| Feed opening size (L * H) | 900*700mm | 1200*700mm | 1200*700mm | 1200*700mm |
| Bale size | 700*400*310mm | 700*400*310mm | 700*400*310mm | 700*400*310mm |
| Bale weight (approx.) | 20-30kgs | 25-35kgs | 30-40kgs | 35-45kgs |
| Voltage (customizable) | 220-480V, 3phase, 50/60Hz | 220-480V, 3phase, 50/60Hz | 220-480V, 3phase, 50/60Hz | 220-480V, 3phase, 50/60Hz |
| Power | 7.5kw | 11kw | 11kw | 15kw |
| Machine weight (approx.) | 2000kgs | 2200kgs | 2400kgs | 2650kgs |
| Overall dimension | 3500*2500*1500mm | 3550*2550*1550mm | 3600*2600*1600mm | 3650*2650*1650mm |

* Unit bale weight depends on the material used

Features

Electric Weighing Device
easy to obtain your desired bale weight by weighing the material before feeding and baling

Safety Device on the Feeding Door
the ram/cylinder will automatically stops running upon detecting the feeding door is open

Balance Block
uses the leverage principle to ensure easy and safe door opening

Specifications

| MODEL | SHB1-WS-50 | SHB1-WS-100 | SHB1-WS-150 | SHB1-WS-250 |
|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| Compressing force | 5Tons | 10Tons | 15Tons | 25Tons |
| Feed opening size (L * H) | 650*400mm | 700*400mm | 800*550mm | 850*600mm |
| Bale size | 400*300*100mm | 400*400*180mm | 550*400*250mm | 600*450*250mm |
| Bale weight (approx.) | 3-7kgs | 5-10kgs | 10-20kgs | 15-25kgs |
| Voltage (customizable) | 220-480V, 3phase, 50/60Hz | 220-480V, 3phase, 50/60Hz | 220-480V, 3phase, 50/60Hz | 220-480V, 3phase, 50/60Hz |
| Power | 4kw | 5.5kw | 7.5kw | 7.5kw |
| Machine weight (approx.) | 800kgs | 830kgs | 900kgs | 1050kgs |
| Overall dimension | 2600*1750*1500mm | 2660*1760*1550mm | 2750*1800*1550mm | 3200*1900*1550mm |

* Unit bale weight depends on the material used